

**BOULDER
KEY/COMBINATION SAFE
INSTRUCTIONS**




Serial No.

Combination Number

| |
|--------------------|
| 1st 3 times (R) |
| 2nd 2 times (L) |
| 3rd 1 time (R) |

Key No.

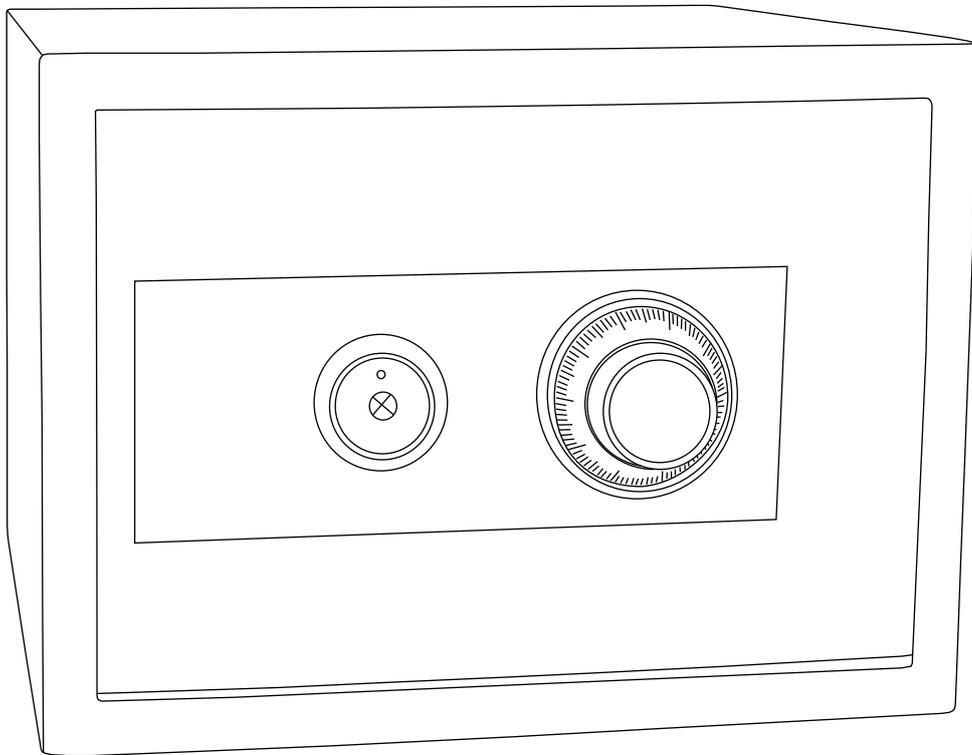

NOTES


- If you wish to clean your safe, use a damp cloth. Do not use liquid or sprayers.
- Never try to dismantle the product by yourself.
- Safe must be installed in an upright position or the warranty shall be void.
- Keep this record of your key number and combination in a secure place, not inside the safe.

**! Do not store access keys or instructions
inside your safe!**

INSTALLING YOUR SAFE

1. Install your safe in a location that is secure and sturdy.
2. Drill holes for expansion bolts/clamping screws in the desired location.
3. Turn the expansion bolts/clamping screws counter clockwise to separate.
4. Use the expansion bolts/clamping screws to fix the safe.
5. Make sure the safe is mounted correctly, then tighten all screws.

Note: Use expansion bolts when there is a concrete surface. Use clamping screws when there is a wooden surface.

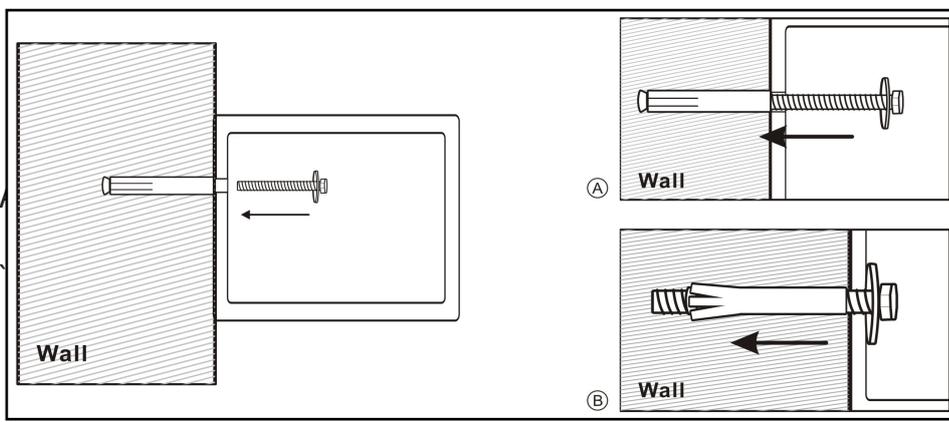

A Sandleford Safe is an aid only in reducing theft, it must form only a part of a range of security measures used. Sandleford will not accept or be held responsible for any loss or damage caused in the event of theft or unauthorised use.

USING YOUR SAFE


Open Safe

All numbers must be dialed exactly. If you pass a number, you can not back up. You must start over. All numbers are to be dialed to the Top Notch located on the top of the dial ring. (the 12 o'clock position).

This safe comes programmed with a 3 wheel combination.

1. Turn the dial clockwise passing the first combination number two times, landing on the number the third time.
2. Now turn the dial counterclockwise, passing the second combination number once, landing on the number the second time around.
3. Turn the dial clockwise until you reach the third combination number.
4. Place the key in the key slot and turn until it stops.
5. Pull the door open using the key.

Example: If the dial combination numbers were 70 - 50 - 30

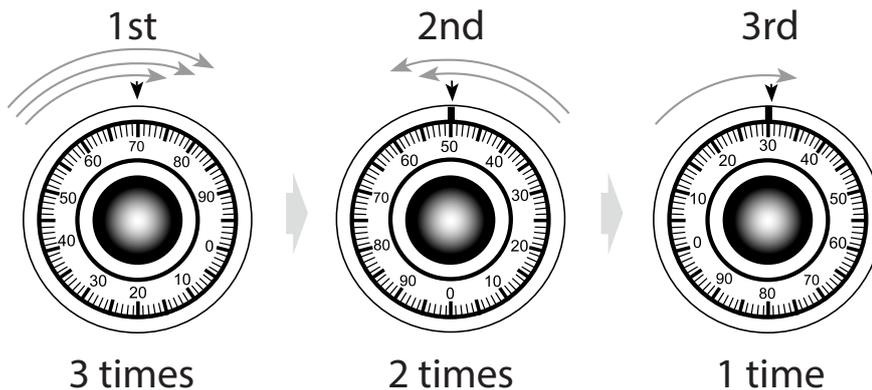

Lock Safe

1. Close the door.
2. Remove the key after returning it to its original position.
3. Turn the dial either direction a few rounds.

! Do not store access keys or instructions inside your safe!