

KEY SAFE INSTRUCTIONS

ATTENTION

Please read the operating instructions carefully before you operate the lock or try to set a new combination of numbers. We can not accept any liability for malfunction due to the setting of the combination being carried out incorrectly. We can not accept any liability for any damage or for loss of property. The product is used entirely at the owner's risk. The Key Keeper leaves the factory with no preset code please note you will need to set your own code before use.

FIRST OPENING


1. Slide the black button marked **CLEAR** downwards
2. Slide the Silver **OPEN** button downwards
3. Remove the Key Safe Cover

Slide the black button marked **CLEAR** DOWNWARDS



SET YOUR CODE

1. Choose your code 3 to 10 numbers
2. Remove the White back cover using a Philips Head Screwdriver on the centre screw
3. You will see 10 small Black Screws with Arrows pointing upwards.
4. With the Setting Key provided turn the screws clockwise 180 degrees so the **Arrows are pointing downwards** E.g. if your code is 1,2,3,4 these Arrows should be facing downwards and the others still facing upwards.

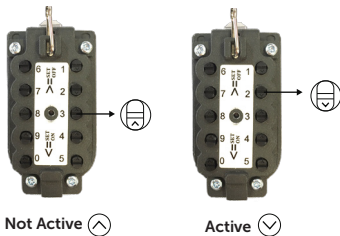

5. Slide the black clear button downwards.
6. Replace the white back cover

CHECKING YOUR CODE

1. Slide the black clear button downward
2. Enter your code (note: you can enter in any order)
3. Slide the silver open button downwards. If your code is set correctly the silver latch will retract completely.
4. With the silver latch completely retracted the Key Safe Cover can be inserted back into the Key Holder

OPENING YOUR SAFE

1. Enter your code (note: you can enter in any order)
2. Slide the silver open button downwards and remove key safe cover

Sandleford Holdings will not accept or be responsible for any loss or damage caused in the event of theft or unauthorised use"

Tel 03 97860055

Sandleford WALL-MOUNT KEY SAFE KSS105




Operating Instructions

INSTALLING YOUR SAFE


FIXING TO BRICK

Mark holes, drill 4x6mm holes, insert wall plugs.
Insert screws into back panel & screw into wall plugs.

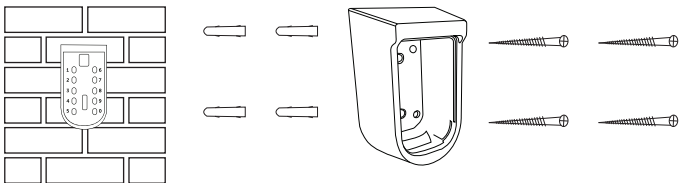

FIXING TO TIMBER FENCE

Insert screws into back panel & screw into wall plugs.

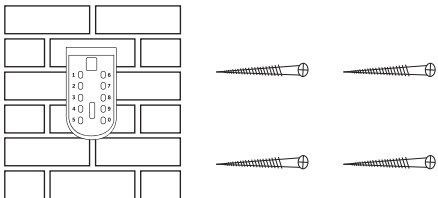

PARTS LIST

